


SB-CPGPB, Oilless Wear Plate 自润滑板



Material Specifications 材料

材料: 高力青铜+固体润滑剂
CuZn25Al5Mn4Fe3 + Graphite(500#SP)

How To Order 订单方式

| Code | W | L |
|----------|-------|---|
| SB-CPGPB | 60 80 | |


| SinoBronze Standard No. | W | L | S | W ₁ | d |
|-------------------------|-----|-----|----|----------------|----|
| SB-CPGPB-6080 | 60 | 80 | 40 | 30 | 13 |
| SB-CPGPB-60100 | 60 | 100 | 60 | | |
| SB-CPGPB-60120 | 60 | 120 | 80 | | |
| SB-CPGPB-10080 | 100 | 80 | 40 | 70 | 18 |
| SB-CPGPB-100100 | 100 | 100 | 60 | | |
| SB-CPGPB-100120 | 100 | 120 | 80 | | |
| SB-CPGPB-15080 | 150 | 80 | 40 | 120 | 18 |
| SB-CPGPB-150100 | 150 | 100 | 60 | | |
| SB-CPGPB-150120 | 150 | 120 | 80 | | |

Unit(单位): mm

JPGPC Oilless Wear Plate 自润滑板



SB-JPG

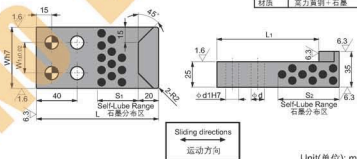

Material 650# + Graphite
材质 高力青铜+石墨

Unit(单位): mm

| SinoBronze Standard No. | W | h7 | L | L ₁ | S ₁ | S ₂ | W ₁ | d | d ₁ |
|-------------------------|-----|-------|-----|----------------|----------------|----------------|----------------|----|----------------|
| JPGPC-60×120 | 60 | 0.630 | 120 | 100 | 40 | 60 | 30 | 13 | 13 |
| JPGPC-60×140 | | | 140 | 120 | 60 | 80 | | | |
| JPGPC-60×160 | | | 160 | 140 | 80 | 100 | | | |
| JPGPC-100×120 | 100 | 0.635 | 120 | 100 | 40 | 60 | 70 | 18 | 16 |
| JPGPC-100×140 | | | 140 | 120 | 60 | 80 | | | |
| JPGPC-100×160 | | | 160 | 140 | 80 | 100 | | | |
| JPGPC-150×120 | 150 | 0.640 | 120 | 100 | 40 | 60 | 120 | 18 | 16 |
| JPGPC-150×140 | | | 140 | 120 | 60 | 80 | | | |
| JPGPC-150×160 | | | 160 | 140 | 80 | 100 | | | |